

XT6 XTREME THIN


6 LED LIGHTHEAD (Surface Mount)



FEATURES

- New Generation Xtreme optic for wide angle visual and classic aesthetics.
- SAE and ECE R65 certified high power output.
- ECE R10 EMC Compliance.
- 0.39" (10mm) Super low-profile thickness.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Solid aluminum base for efficient heat dissipation.

DIMENSIONS

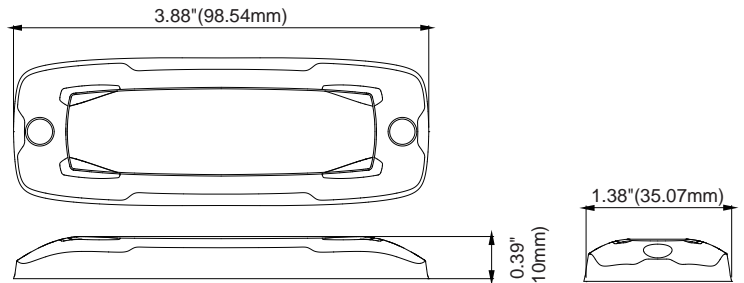

SPECIFICATIONS

Meets: ECE R65 (XA1, XB1)
ECE R10
SAE J595 Class 1
CA Title 13 (R, B)
IPX8

Bulb: High-power LED x 6pcs

Warning Patterns: 16 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.44A @12VDC / 0.22A @24VDC
(varies with flash pattern)

Avg. Power: 5.3 Watts (varies with flash pattern)

Max. Current: 0.88A @12VDC / 0.44A @24VDC

Max. Power: 10.6 Watts

Wires: Red-Vcc : 25cm (20AWG)

Black-GND : 25cm (20AWG)

Yellow-Sync & Functions : 25cm (20AWG)

Fuse Recommended: 1A

Available in: RED , BLUE , AMBER , WHITE

PART NO.

- 0212009 (R65 BLUE)
- 0212008 (R65 AMBER)
- 0212010 (SAE RED)
- 0212011 (SAE WHITE)

FLASH PATTERN

Flash Patterns			
1	Double(R65)	9	Double (SAE)
2	Single(2Hz)	10	Triple (SAE)
3	Triple(2Hz)	11	Quad (SAE)
4	Quad(2Hz)	12	Quint (SAE)
5	Random	13	Ultra (SAE)
6	Steady	14	Single-Quad
7	Single(SAE) (CA13)	15	Single H/L
8	Mega	16	Singe-Triple-Quint

FLANGE KIT

99.M60X2.000
(FLANGE, CHROME)



99.M60X1.000
(FLANGE, BLACK)



99.M60X0.000
(FLANGE, WHITE)

